


# LCD35QVGAF LCD35QVGAF TS

## TECHNICAL SPECIFICATIONS

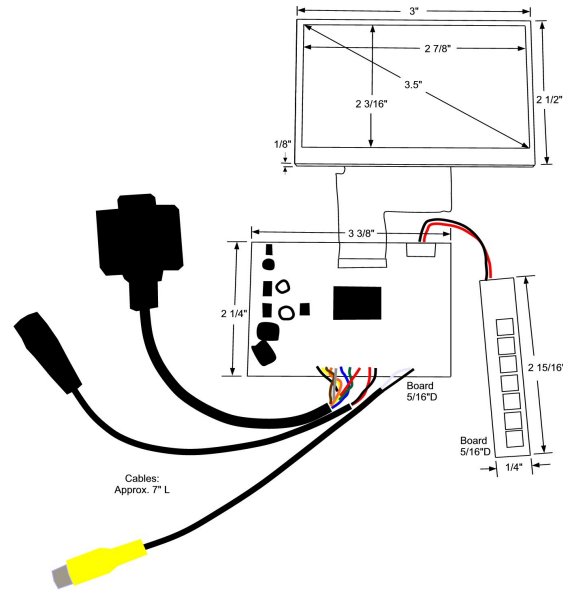

3.5" Video/Computer Input  
Open Frame LCD Module  
with LED Back Light and Optional  
Touch Screen

### FEATURES

- 2 INPUTS (VGA and NTSC/PAL Composite)
- AUTO POWER ON
- AUTO SCALES TO VGA, SVGA, XGA
- OSD (ON SCREEN DISPLAY)
- LOW POWER LED BACKLIGHT
- IR REMOTE

### SPECIFICATIONS

<b>DISPLAY:</b>	3.5" Color TFT LCD
<b>INPUT SIGNAL:</b>	Computer/NTSC/PAL
<b>RESOLUTION:</b>	320 x 240 (Quarter VGA)
<b>NUMBER OF PIXELS:</b>	76,780
<b>BACK LIGHT:</b>	LED
<b>BRIGHTNESS RATING:</b>	350 NIT Typ.
<b>CONTRAST RATIO:</b>	500:1
<b>VIEWING ANGLE (L/R/T/B):</b>	60°/60°/50°/55°
<b>ACTIVE AREA:</b>	70 X 52.2 mm
<b>POWER REQUIREMENTS:</b>	12VDC @ 300 mA
<b>VIDEO INPUT LEVEL:</b>	1.0 V p-p (positive) 75 Ohm
<b>SCREEN DIMENSIONS:</b>	2 1/2"H x 3"W x 1/8"D
<b>DRIVER BOARD DIMENSIONS:</b>	2 1/4"W x 3 3/8"W x 5/16"D
<b>OPERATING TEMPERATURE:</b>	0° ~ 60°C (32° ~ 140°F)
<b>STORAGE TEMPERATURE:</b>	-30° ~ 60°C (-22° ~ 140°F)

\*Specifications subject to change without notice.

Miller Technologies  
109 Fairytale Lane  
Surf City, NC 28445

Miller  
Technologies

[www.millertech.com](http://www.millertech.com)

Pho: (910) 328-2829  
Fax: (910) 328-5494  
Email: [info@millertech.com](mailto:info@millertech.com)