

WPLC296R TECHNICAL SPECIFICATIONS

REVERSE IMAGE WATERPROOF 1/3" DSP COLOR BULLET CAMERA (ALSO AVAILABLE IN BLACK & WHITE VERSION)

This unit is a metal housed, sealed waterproof camera that provides outstanding picture quality and easy installation for outdoor applications.



The WPLC296R meets the highest standards and performs well in low light situations. At below 1 LUX the camera automatically switches from color to B/W. This camera also provides 0.2 LUX for excellent low-light sensitivity and features 380 TV lines of resolution.

It comes with 0.6 meters of cable, a BNC or RCA connector for video and a DC jack for power.



PART NO. WPLC296R

Imager:	1/3" DSP Color CCD
Horizontal Resolution:	380 TV Lines
Picture Element:	N:290k P:320k
Min. Illumination:	0.2 Lux @ F1.4
Synchronizing System:	Internal
Scanning System:	2:1 Interlaced
Video Output:	1 Vp-p 75 Composite
S/N Ratio (AGC Off):	More Than 50 dB
Electronic Iris:	1/50, 1/60 - 1/100,000 sec.
Smear Effect:	0.005%
Gamma Correction:	r = 0.45 - 1.0
Special Function:	Auto Color - B/W Switching
Gain Control:	Auto 4dB - 30dB
MTBF:	80,000 hours
Power Source:	DC12V (Tolerance: 8V - 15V)
Operating Current:	90 mA w/Regulated Power In
Measurement:	21 mm (dia) x 71mm (L)
Weight (Approx.)	300g

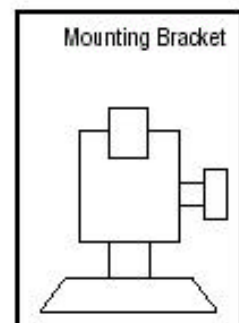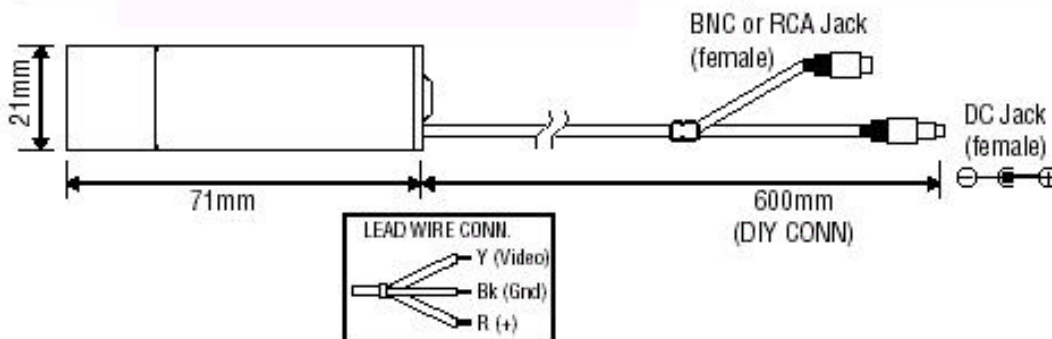

Miller Technologies
109 Fairytale Lane
Surf City, NC 28445

**Miller
Technologies**

Pho: (910) 328-2829
Fax: (910) 328-5494
Email: info@millertech.com

www.millertech.com